
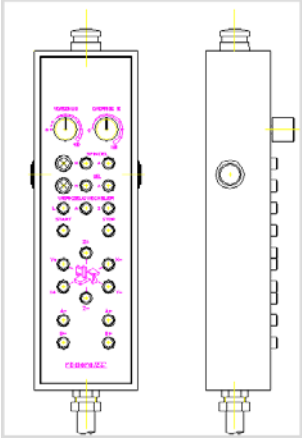
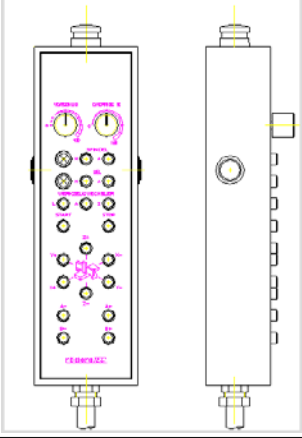










**R&R-Tastaturen  
mit vandalensicheren Metallastern  
MT1, MT2, IKV, IKV2, IKV3, IKV5, IKV6**

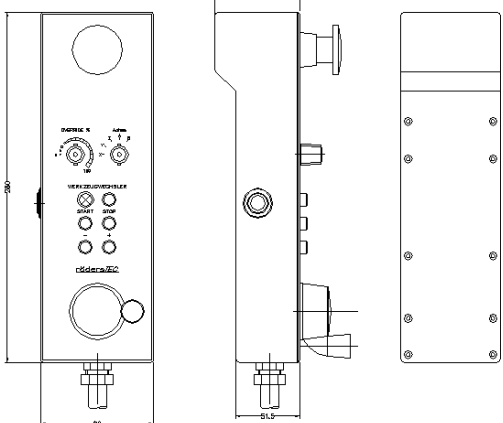
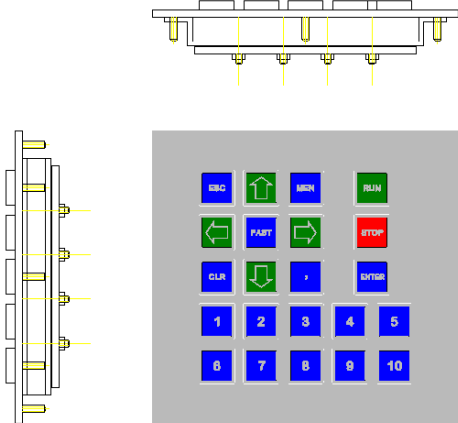
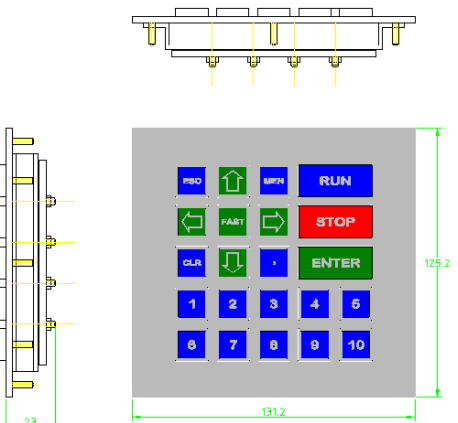




Art.-Nr	Bezeichnung	Bild
498	IK401 with 5 m cable RS422  R&R remote control case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 288 x 87 x 54 mm 19 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 6945 interface board look for RR-P-190A/191 ISPS-2	
499	IK401 with 10 m cable RS422  R&R hand held remote control case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 288 x 87 x 54 mm 19 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around interface board look for RR-P-190/191A ISPS-2 data sheet DNR 6945	
101	IK402 with 2.5 m cable RS422 R&R remote control incremental hand wheel 100 pulses per round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 87 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 5975	
102	IK402 with 5 m cable RS422  R&R remote control incremental hand wheel, 100 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 265 x 87 x 65 mm 5 patented R&R keys lift 3 mm, actuation force 1 N 2 confirmation keys, 2 options switches 1 emergency off-switch protection class IP 5 4 all around data sheet DNR 5975	

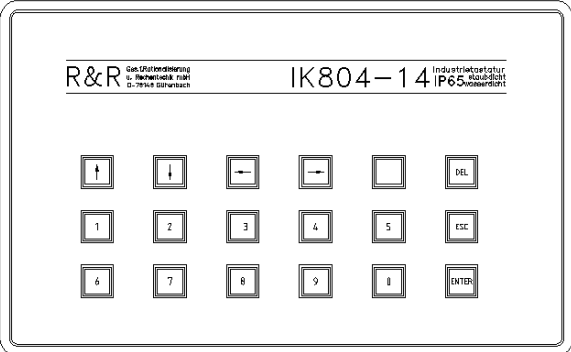
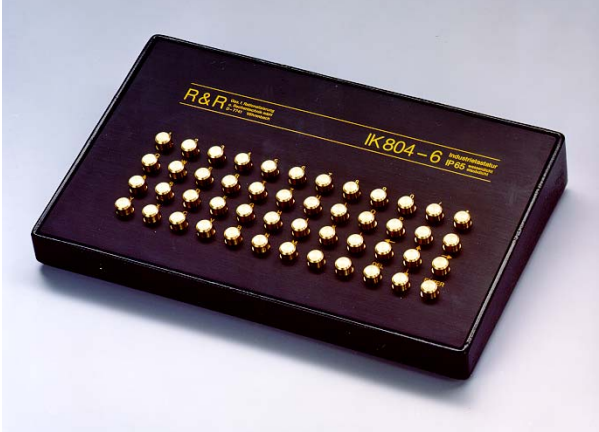

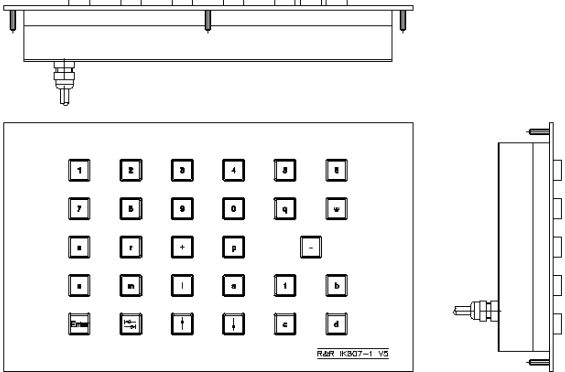


Art.-Nr	Bezeichnung	Bild
437	<p>IK403 with 5 m cable RS422 german</p> <p>R&amp;R remote control                      incremental hand wheel, 100 pulses/round                      case aluminium anodized                      (W x H x D) 265 x 80 x 65 mm                      5 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      1 confirmation keys, 2 options switches                      1 emergency off-switch                      protection class IP 6 5 all around                      data sheet DNR 6639</p>	
541	<p>IK403 with 5 m cable RS422 English</p> <p>R&amp;R remote control                      incremental hand wheel, 100 pulses/round                      case steel lacquered                      front panel aluminium electrolytic-oxidated                      (W x H x D) 265 x 87 x 65 mm                      5 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      1 confirmation keys, 2 options switches                      1 emergency off-switch                      protection class IP 5 4 all around                      data sheet DNR 6639</p>	
465	<p>IK403 with 8 m cable RS422 german</p> <p>R&amp;R remote control                      incremental hand wheel, 100 pulses/round                      case steel lacquered                      front panel aluminium electrolytic-oxidated                      (W x H x D) 265 x 80 x 65 mm                      5 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      1 confirmation key 230 V, 2 options switches                      1 emergency off-switch                      protection class IP 5 4 all around                      data sheet DNR 6639</p>	
783	<p>IK403 with 8 m cable RS422 english</p> <p>R&amp;R remote control                      incremental hand wheel, 100 pulses/round                      case aluminium anodized                      (W x H x D) 265 x 80 x 65 mm                      5 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      1 confirmation key 230 V, 2 options switches                      1 emergency off-switch                      protection class IP 5 4 all around                      data sheet DNR 6639</p>	

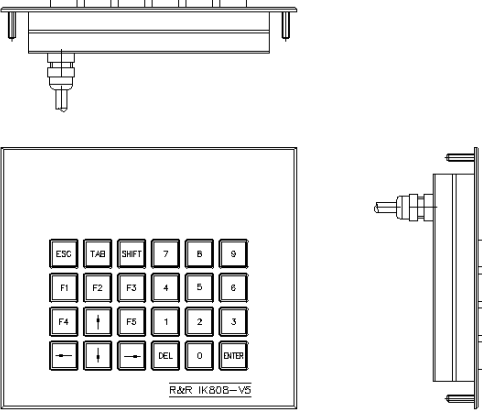
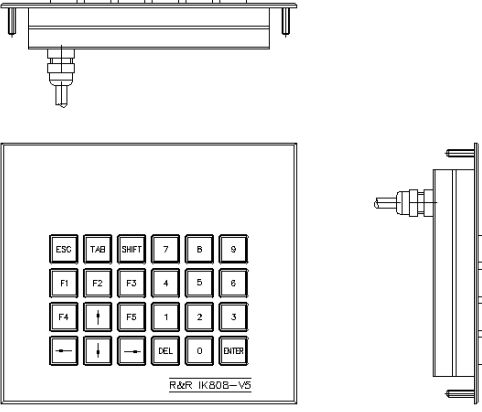

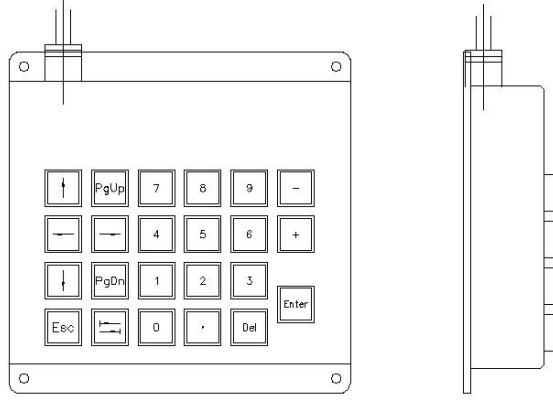
Art.-Nr	Bezeichnung	Bild
542	IK403 accessory cable	
711	IK404 with 5 m cable RS422  R&R remote control incremental hand wheel, 30 pulses/round case steel lacquered front panel aluminium electrolytic-oxidated (W x H x D) 280 x 90 x 68 mm 5 patented R&R keys lift 3 mm, actuation force 1 N confirmation keys, 2 options switches 1 emergency off-switch protection class IP 6 5 all around data sheet DNR 7956	
899	IK5x5-V5  R&R industrial keyboard (W x H x D) 160 x 160 x 25 mm interface 1 common pin, 1 pin for each key 22 R&R metal keys inscription engraved lift 3 mm, actuation force 1 N connector: pads protection class IP 6 5 front side data sheet DNR 9183	
904	IK5x5V5-1  R&R industrial keyboard (W x H x D) 131,2 x 125,2 x 25 mm interface 1 common pin, 1 pin for each key 22 R&R metal keys inscription engraved lift 3 mm, actuation force 1 N connector: pads protection class IP 6 5 front side data sheet DNR 9183	

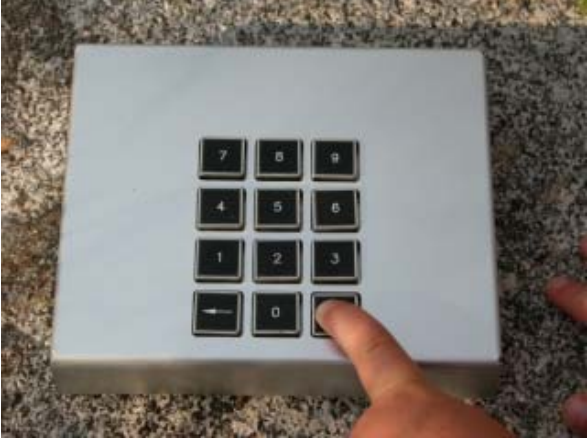
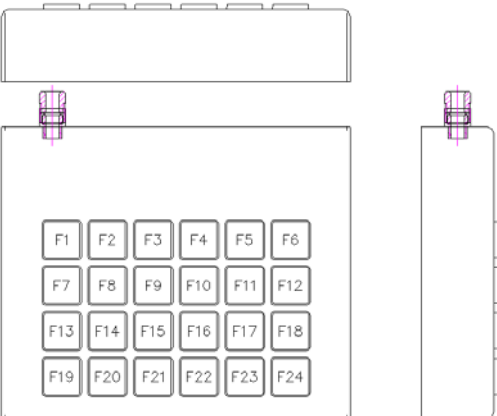

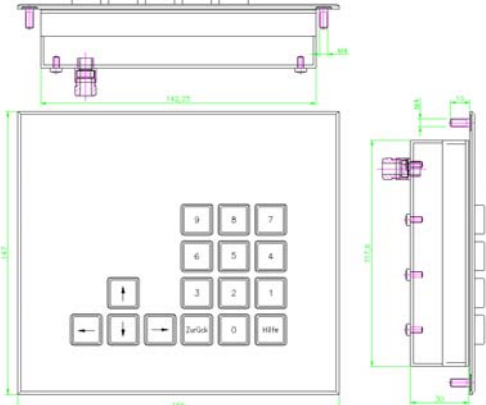
**R&R metal keyboards**  
**April 2004**  
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30  
 Kreissparkasse Tuttlingen (BLZ 64350070) 392  
 USt.-IdNr.: DE141907699


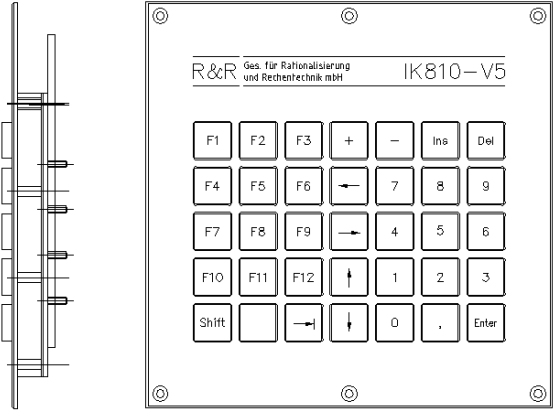

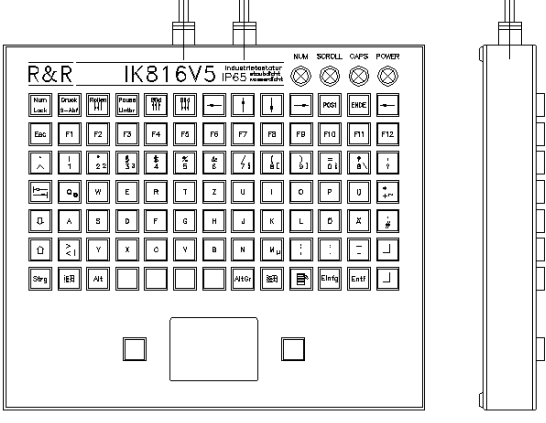
Art.-Nr	Bezeichnung	Bild
825	<p>IK804-14 AT -40°C to +80°C</p> <p>R&amp;R industrial keyboard                      suit case, Al sand cast lacquered                      front panel aluminium electrolytic-oxidated                      (W x H x D) 300 x 184 x 30 (50) mm                      18 patented R&amp;R keys                      vandal proofed metal key-tops V5                      lift 3 mm, actuation force 1 N                      weight 2.6 kg                      protection class IP 6 5 all around                      data sheet DNR 8651</p>	
73	<p>IK804-6 AT</p> <p>R&amp;R industrial keyboard                      suit case, Al sand cast lacquered                      front panel aluminium anodized                      (W x H x D) 300 x 184 x 30 (50) mm                      48 patented R&amp;R keys                      max. 91 (7 x 13) keys                      lift 3 mm, actuation force 1 N                      brass key caps type V                      weight 2.6 kg                      protection class IP 6 5 all around                      data sheet DNR 4029</p>	
895	<p>IK806-V5 AT</p> <p>R&amp;R Industrial-keyboard                      mountable module                      front panel Al anodized                      (WxHxD in mm) 276x122x40 mm                      39 patented vandalism proofed R&amp;R metall keys                      inscription engraved                      lift 3 mm, actuation force 1 N                      protection class I P 6 5                      weight 1 kg                      data sheet DNR 9161</p>	
894	<p>IK807-1 PS2</p> <p>R&amp;R industrial keyboard                      front panel aluminium anodized                      (W x H x D) 303 x 185 x 40) mm                      29 patented R&amp;R keys                      vandal proofed metal key-tops V5                      lift 3 mm, actuation force 3 N                      weight 2.6 kg                      protection class IP 6 5 all around                      data sheet DNR 9159</p>	


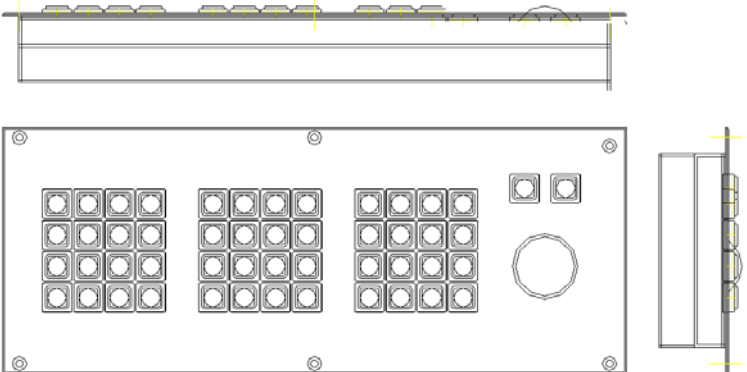



Art.-Nr	Bezeichnung	Bild
761	<p>IK808V5 AT</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 166 x 147 x 25 mm                      24 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      vandal proof metal keycaps V5                      layout custom design                      0°C to +50°C                      protection class IP 6 5 all around                      data sheet DNR 8156</p>	
1510	<p>IK808V5 PS/2</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 166 x 147 x 25 mm                      24 patented R&amp;R keys                      lift 3 mm, actuation force 1 N                      vandal proof metal keycaps V5                      layout custom design                      0°C to +50°C                      protection class IP 6 5 all around                      data sheet DNR 8156</p>	
1015	<p>IK808V5-1 RS232C</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 166 x 147 x 25 mm                      17 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      17 vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 9729</p>	
1676	<p>IK808V5-2 PS/2</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 140 x 140 x 37 mm                      patented R&amp;R keys                      lift 1.2mm, actuation force 1.5 N                      23 vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 11146</p>	

Art.-Nr	Bezeichnung	Bild
1675	<p>IK808V5-3 TTL</p> <p>R&amp;R industrial keyboard                      housing aluminium anodized                      (W x H x D) 145 x 122 x 35 mm                      12 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 12086</p>	
1685	<p>IK808V5-4 PS/2</p> <p>R&amp;R industrial keyboard                      housing aluminium anodized                      (W x H x D) 145 x 122 x 35 mm                      24 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 12369</p>	
1684	<p>IK808V5-5 PS/2</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 166 x 147 x 25 mm                      17 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      17 vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 12403</p>	
1690	<p>IK808V5-6 PS/2</p> <p>R&amp;R industrial keyboard                      mountable case                      front panel aluminium anodized                      (W x H x D) 166 x 147 x 25 mm                      17 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      17 vandal proof metal keycaps V5                      0°C to +50°C                      protection class IP 6 5                      data sheet DNR 12409</p>	



Art.-Nr	Bezeichnung	Bild
911	<p>IK810V5 AT with housing</p> <p>R&amp;R industrial keyboard                      desktop case, Al anodized                      (W x H x D) 170 x 170 x 30 mm                      n-key rollover                      watchdog                      max. 7 x 5 patented R&amp;R keys                      metal key top V5                      lift 3 mm, actuation force 1 N                      layout custom design                      protection class IP 6 5 front panel                      data sheet DNR 8558</p>	
805	<p>IK810V5 AT</p> <p>R&amp;R industrial keyboard                      mountable case, Al anodized                      (W x H x D) 170 x 170 x 30 mm                      n-key rollover                      watchdog                      max. 7 x 5 patented R&amp;R keys                      metal key top V5                      lift 3 mm, actuation force 1 N                      layout custom design                      protection class IP 6 5 front panel                      data sheet DNR 8558</p>	
1509	<p>IK810V5 PS/2 with housing</p> <p>R&amp;R industrial keyboard                      desktop case, Al anodized                      (W x H x D) 170 x 170 x 30 mm                      n-key rollover                      watchdog                      max. 7 x 5 patented R&amp;R keys                      metal key top V5                      lift 3 mm, actuation force 1 N                      layout custom design                      protection class IP 6 5                      data sheet DNR 8558</p>	
842	<p>IK816V5 PS2/PS2</p> <p>R&amp;R Industrial desktop keyboard                      touch pad                      front plate Al anodised                      (W x H x D) 277 x 240 x 42,5 mm                      91 patented R&amp;R-keys                      metal key tops V5                      lift 3 mm, actuation force 1 N                      watchdog                      cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 8787</p>	

Art.-Nr	Bezeichnung	Bild
920	<p>IKL1-14x1 with high graded steel inlays</p> <p>R&amp;R mountable keyboards            (H x B x T) 464 x 60 x 30 mm            14 vandal proofed R&amp;R keys LT1            stainless steel inlays 36x16 mm, mounted by customer            lift 1,5 mm, actuation force 2 N</p> <p>data sheet DNR 9298</p>	
1696	<p>IKL4-116 RS232C(RS422)/PS2</p> <p>R&amp;R Industrial keyboard            with integrated 38 mm tracking ball            front plate al anodized            (W x H x D) 360 x 174 x 45 mm            48 patented R&amp;R-keys key cap LT4            illumination red/green led 3mm            silicon key DNR 11001            lift 1.5 mm, actuation force 1 N            lifetime &gt; 3 million cycles            watchdog, cable 3 m            protection class IP 6 5            back side IP 5 4            trackball protection class IP 65            data sheet 12451</p>	
1541	<p>IKL4-318 PS2</p> <p>R&amp;R Industrial keyboard            with integrated 38 mm tracking ball            front plate al anodized            (W x H x D) 321 x 144 x 40 mm            64 patented R&amp;R-keys key cap LT4            illumination red led 3mm            silicon key DNR 11001            lift 1.5 mm, actuation force 1 N            lifetime &gt; 3 million cycles            watchdog, cable 3 m            protection class IP 6 5            data sheet 11518</p>	
1512	<p>IKL4-318-T4 PS2/PS2</p> <p>R&amp;R Industrial keyboard            with integrated 38 mm tracking ball            front plate al anodized            (W x H x D) 398 x 140 x 45 mm            64 patented R&amp;R-keys key cap LT4            illumination red led 3mm            silicon key DNR 11001            lift 1.5 mm, actuation force 1 N            lifetime &gt; 3 million cycles            watchdog, cable 3 m            protection class IP 6 5            back side IP 5 4            trackball protection class IP 65            data sheet 11518</p>	

**R&R metal keyboards**

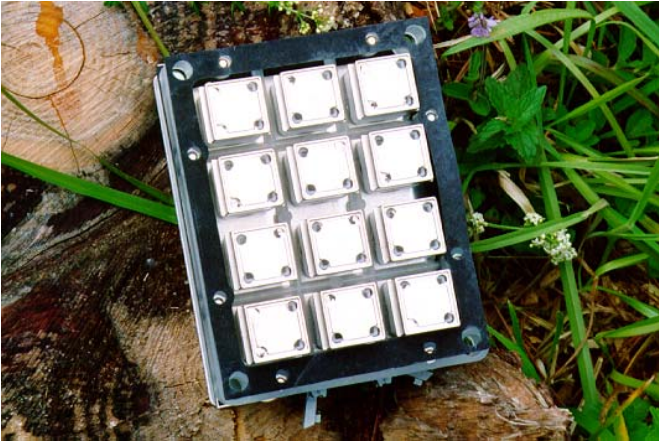

April 2004

www.RuRgmbH.de info@RuRgmbH.de


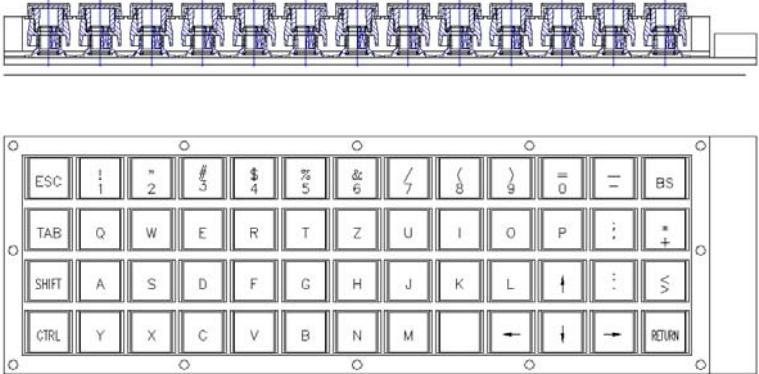
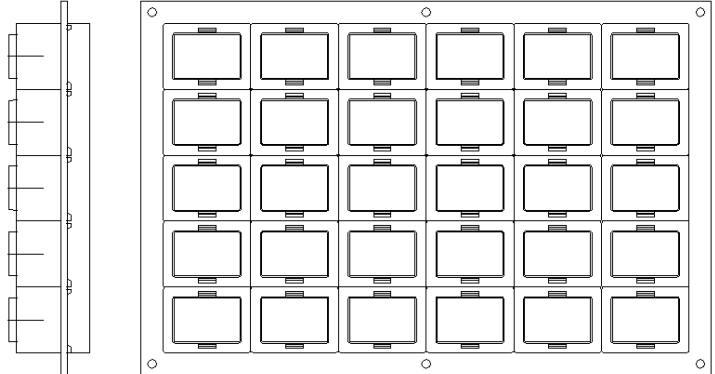
Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

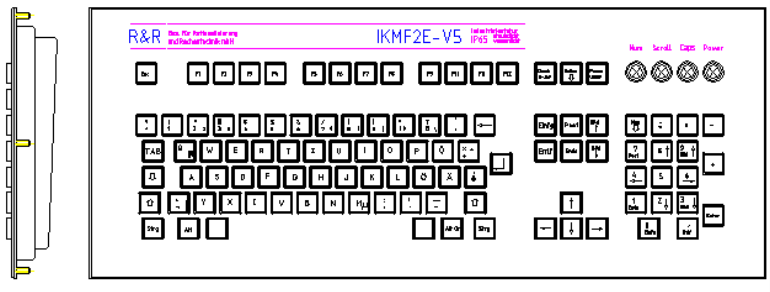
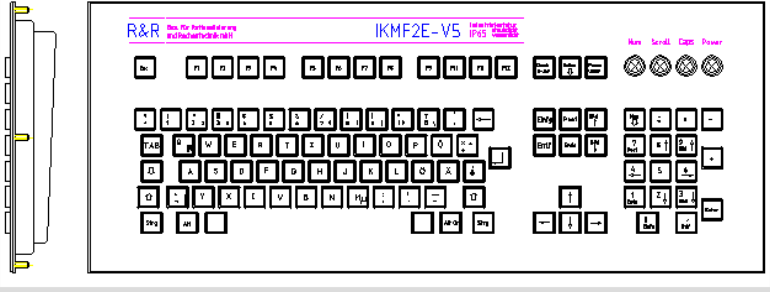
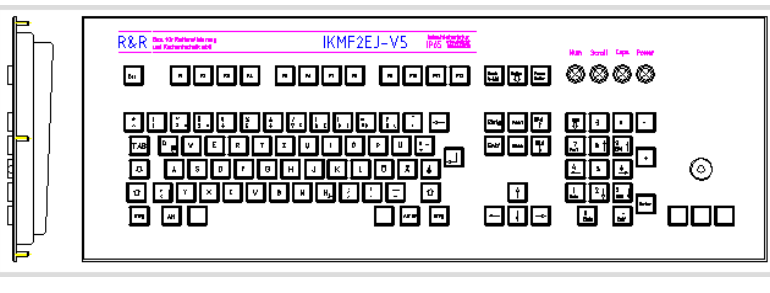
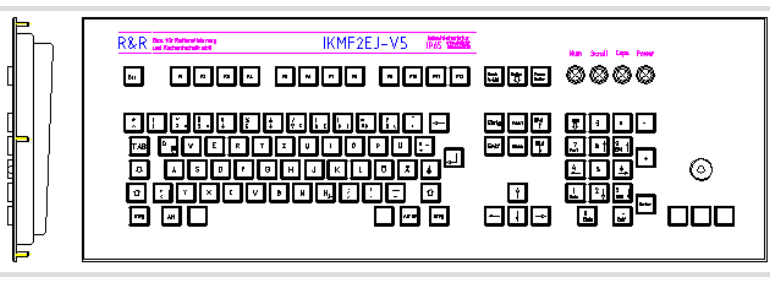
Kreissparkasse Tuttlingen (BLZ 64350070) 392

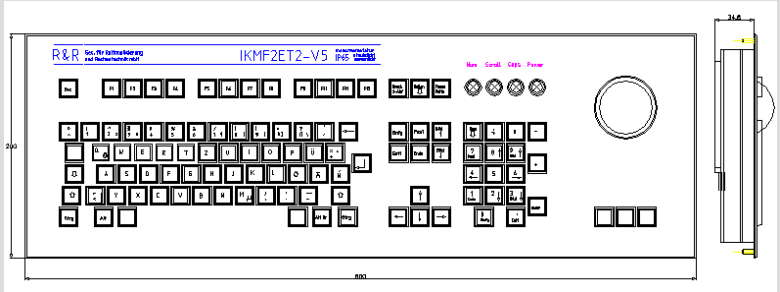
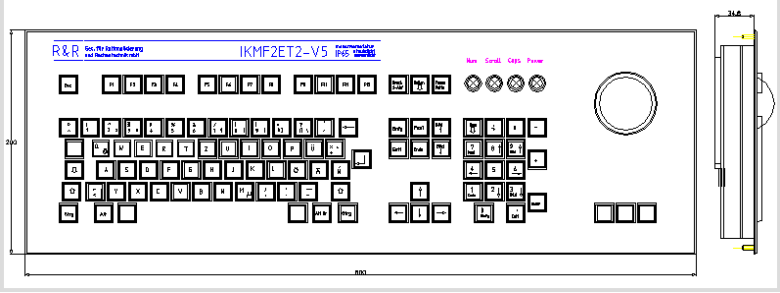
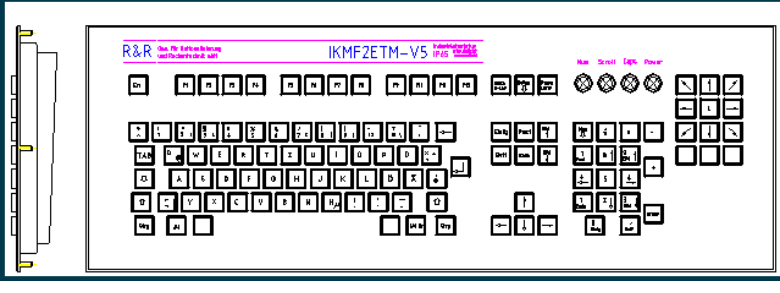
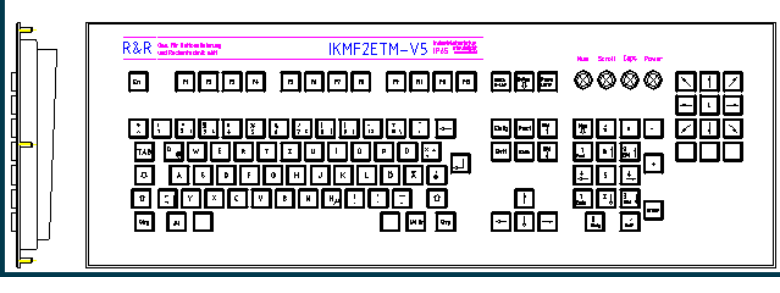
USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
21	<p><b>IKM12</b></p> <p>R&amp;R industrial keyboard mount case (W x H x D) 86 x 110 x 42 mm 4 x 3 vandal-proof R&amp;R metal keys MT2 lift 1.5 mm, actuation force 2 N matrix 2 x 6 diode decoupled miniature lamps T1 28V weight appr. 0.5 kg protection class IP 6 5 front side data sheet DNR 5958</p>	
23	<p><b>IKM-14x2B</b></p> <p>R&amp;R mounting keyboard custom design (H x W x D) 466 x 132 x 42 mm vandal-proof R&amp;R keys MT2 Zn-die-cast key caps 30 x 20 mm lift 1.5 mm, actuation force 2 N AT compatible, n-key-rollover watchdog, alarm system every 8 digital I/O service display weight appr. 1.8 kg protection class IP 6 5 data sheet DNR 5920</p>	
22	<p><b>IKM-20x2</b></p> <p>R&amp;R mounting keyboard custom design (H x W x D) 506 x 132 x 42 mm vandal-proof R&amp;R keys MT2 Zn-die-cast key caps 18 x 18 mm lift 1.5 mm, actuation force 2 N AT compatible, n-key-rollover watchdog, alarm system 8 digital INPUT 8 digital OUTPUT service display weight appr. 1.7 kg protection class IP 6 5 front side data sheet DNR 5921</p>	



Art.-Nr	Bezeichnung	Bild
210	<p><b>IKM-4x7 AT</b></p> <p>front panel V2A brushed            case Al and PE black            (W x H x D) appr. 200 x 150 x 35 mm            vandal-proof R&amp;R keys MT2            AT-controller with watchdog            3 m cable with AT plug            17 patented R&amp;R keys            key caps type MT2 18 x 18 mm            Zn-die cast nickeled            frame grid 23 mm            switch pad DNR 5000            lift 1.5 mm, actuation force 2 N            lifetime &gt; 1 million actuations            option: layout to customer specification max. 4x7            keys            protection class IP 6 5 front side            data sheet DNR 6597</p>	
197	<p><b>IKM-4x13 AT</b></p> <p>R&amp;R industrial keyboard            (W x H x D) appr. 322.4 x 102 25 mm            52vandal-proof R&amp;R metal keys            key caps type MT2 Zn die cast with            Al in-laid signs engraved            silicon switch pad DNR 5000            lift 1.5 mm, actuation force 2 N            lifetime &gt; 3 million actuations            protection class IP 6 5 front side            3 m cable            5-pin diode plug            data sheet DNR 6200</p>	
417	<p><b>IKM5x6 RS232C</b></p> <p>R&amp;R industrial keyboard            plastic case            (W x H x D) appr. 260 x 170 x 40 mm            5x6 R&amp;R keys type LT1            key caps Zn-die cast nickeled            8-bit microcontroller with watchdog            interface RS232C            protection class IP 40 rear side open            data sheet DNR 6516</p>	

Art.-Nr	Bezeichnung	Bild
616	<p><b>IKMF2-E AT</b></p> <p>R&amp;R industrial mounting keyboard                      front panel AL elox                      (W x H x D) 500 x 200 x 26 mm                      102 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      vandal proof metall key caps V5                      3 m cable                      protection class IP 65 all around                      data sheet DNR 7539</p>	 <p>The diagram shows the keyboard layout for the IKMF2-E AT model. It features a standard QWERTZ keyboard layout with 102 keys. The top row includes function keys (Esc, F1-F12), a numeric keypad, and three status LEDs labeled 'Num', 'Serial', and 'Caps Power'. A side view of the keyboard's connector is shown to the left of the layout diagram.</p>
617	<p><b>IKMF2-E PS2</b></p> <p>R&amp;R industrial mounting keyboard                      front panel AL elox                      (W x H x D) 500 x 200 x 26 mm                      102 patented R&amp;R keys                      lift 1.2 mm, actuation force 1.5 N                      vandal proof metall key caps V5                      3 m cable                      protection class IP 65 all around                      data sheet DNR 7539</p>	 <p>The diagram shows the keyboard layout for the IKMF2-E PS2 model. It features a standard QWERTZ keyboard layout with 102 keys. The top row includes function keys (Esc, F1-F12), a numeric keypad, and three status LEDs labeled 'Num', 'Serial', and 'Caps Power'. A side view of the keyboard's connector is shown to the left of the layout diagram.</p>
625	<p><b>IKMF2EJ-V5 AT/RS232C</b></p> <p>R&amp;R Industrial Mountable keyboard                      joystick with patented                      capacitive sensing                      front plate Al elox                      (W x H x D) 560 x 200 x 30 mm                      105 patented R&amp;R-keys                      vandal proof metal key caps V5                      lift 3 mm, actuation force 1 N                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 7535</p>	 <p>The diagram shows the keyboard layout for the IKMF2EJ-V5 AT/RS232C model. It features a QWERTZ keyboard layout with 105 keys, including a joystick on the right side. The top row includes function keys (Esc, F1-F12), a numeric keypad, and three status LEDs labeled 'Num', 'Serial', and 'Caps Power'. A side view of the keyboard's connector is shown to the left of the layout diagram.</p>
626	<p><b>IKMF2EJ-V5 PS2 / PS2</b></p> <p>R&amp;R Industrial Mountable keyboard                      joystick with patented                      capacitive sensing                      front plate Al elox                      (W x H x D) 560 x 200 x 30 mm                      105 patented R&amp;R-keys                      vandal proof metal key caps V5                      lift 3 mm, actuation force 1 N                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 7535</p>	 <p>The diagram shows the keyboard layout for the IKMF2EJ-V5 PS2 / PS2 model. It features a QWERTZ keyboard layout with 105 keys, including a joystick on the right side. The top row includes function keys (Esc, F1-F12), a numeric keypad, and three status LEDs labeled 'Num', 'Serial', and 'Caps Power'. A side view of the keyboard's connector is shown to the left of the layout diagram.</p>

Art.-Nr	Bezeichnung	Bild
615	<p><b>IKMF2ET2-V5 AT/RS232C</b></p> <p>R&amp;R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&amp;R-keys lift 3 mm, actuation force 1 N vandal-proof metall key caps V5 watchdog, cable 3 m keyboard IP65 Trackingball protected against humidity data sheet DNR 7210</p>	
618	<p><b>IKMF2ET2-V5 PS2/PS2</b></p> <p>R&amp;R Industrial mounting keyboard with integrated tracking ball front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&amp;R-keys lift 3 mm, actuation force 1 N vandal-proof metall key caps V5 watchdog, cable 3 m protection class keyboard IP65 Trackingball protected against humidity data sheet DNR 7210</p>	
620	<p><b>IKMF2ETM-V5 PS2/PS2</b></p> <p>R&amp;R Industrial mounting keyboard with integrated key mouse front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&amp;R-keys lift 1.2 mm, actuation force 1.5 N vandal-proof metall key caps V5 watchdog, cable 3 m protection class IP65 - dust and water proofed data sheet DNR 7542</p>	
619	<p><b>IKMF2ETM-V5 PS2/PS2</b></p> <p>R&amp;R Industrial mounting keyboard with integrated key mouse front plate Al elox (W x H x D) 600 x 200 x 40 mm 105 patented R&amp;R-keys lift 1.2 mm, actuation force 1.5 N vandal-proof metall key caps watchdog, cable 3 m protection class IP65 - dust and water proofed data sheet DNR 7542</p>	



## R&R metal keyboards




April 2004

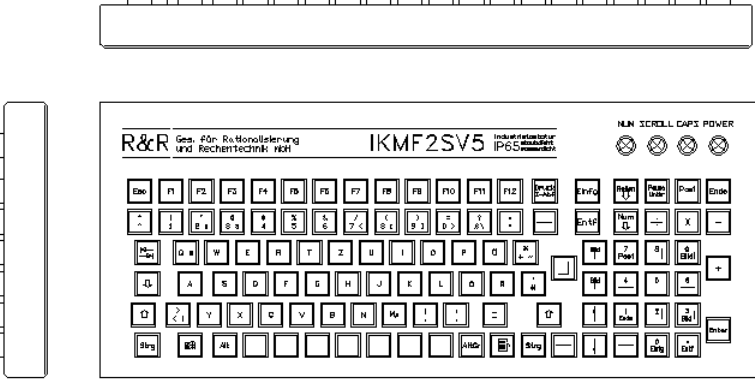
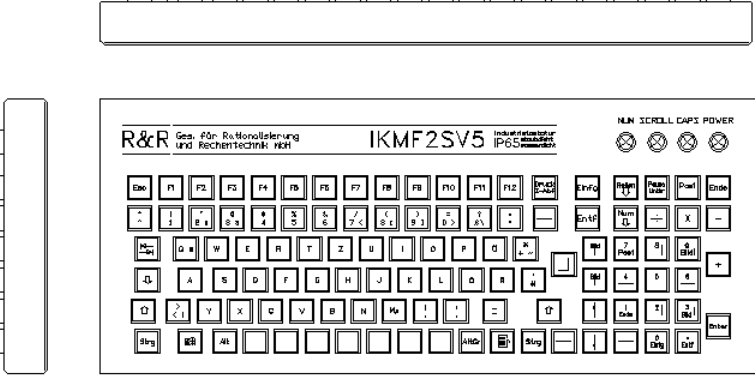


www.RuRgmbH.de info@RuRgmbH.de



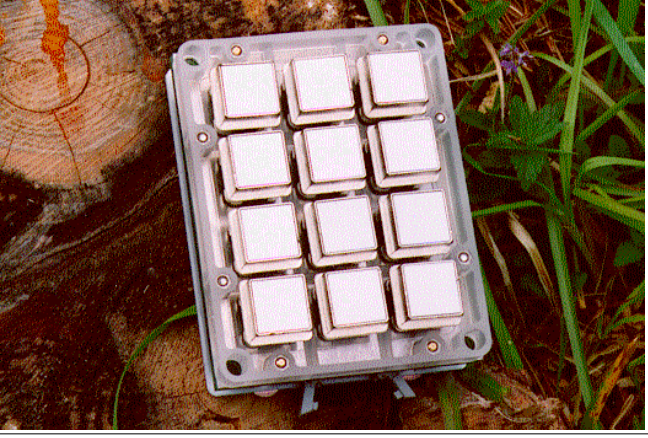
Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
851	<p><b>IKMF2STV5 PS2/PS2</b></p> <p>R&amp;R Industrial keyboard trackball ball diameter 50,8 mm front plate Al black anodised (W x H x D) 470 x 172 x 51 mm 116 patented R&amp;R-keys metall key cap V5 inlays Al black anodized inscription engraved lift 3 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around data sheet DNR 8817</p>	
1682	<p><b>IKMF2STV6 radio keyboard</b></p> <p>trackball stainless steel 38.1 mm housing stainless steel (W x H x D) 500 x 230 x 45 mm 116 patented R&amp;R-keys metall key cap V6 inlays stainless steel inscription engraved lift 1.2 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around Keyboard with external keyboard 1x external mouse receiver with external mouse and keyboard frequency 2.4 MHz data sheet DNR 12347</p>	
1691	<p><b>IKMF2STV6-1 radio keyboard</b></p> <p>trackball stainless steel 38.1 mm housing stainless steel (W x H x D) 500 x 230 x 45 mm 116 patented R&amp;R-keys metall key cap V6 inlays stainless steel inscription engraved lift 1.2 mm, actuation force 1 N watchdog, cable 3 m protection class IP 6 5 all around receiver with 1x external keyboard 1x external mouse Frequency 2.4 GHz data sheet DNR 12347</p>	

Art.-Nr	Bezeichnung	Bild
1539	<p><b>IKMF2SV5 german PS/2 0° C to +50° C</b></p> <p>R&amp;R Industrial keyboard                      front plate Al anodized                      (W x H x D) 406 x 170 x 32 mm                      watchdog                      102 patented R&amp;R-keys                      lift 3 mm                      actuation force 1 N                      3 m cable                      protection class IP 6 5 all around                      data sheet DNR 11645</p>	
1640	<p><b>IKMF2SV5 french PS/2 0° C to +50° C</b></p> <p>R&amp;R Industrial keyboard                      front plate Al anodized                      (W x H x D) 406 x 170 x 32 mm                      watchdog                      102 patented R&amp;R-keys                      lift 3 mm                      actuation force 1 N                      3 m cable                      protection class IP 6 5 all around                      data sheet DNR 11645</p>	
1566	<p><b>IKS102 PS2/PS2</b></p> <p>R&amp;R Internet-Tastatur                      mit integriertem kapazitiven Maus                      Einbaugehäuse                      Frontplatte Einscheibensicherheitsglas, Gehäuse                      Aluminium natur eloxiert                      (B x H x T) ca. 334 x 140 x 31 mm                      64 kapazitive Tasten                      Kabel 3 m                      Schutzart IP 6 5 rundum                      kapazitives Maus                      PS/2 Schnittstelle 3m Kabel                      Datenblatt DNR 12112</p>	
1623	<p><b>IKS103 PS2/PS2</b></p> <p>R&amp;R Internet-Tastatur                      Einbaugehäuse                      Frontplatte Einscheibensicherheitsglas, Gehäuse                      Aluminium natur eloxiert                      (B x H x T) ca. 334 x 148 x 31 mm                      64 kapazitive Tasten                      Kabel 3 m                      Schutzart IP 6 5 rundum                      Datenblatt DNR 12185</p>	

Art.-Nr	Bezeichnung	Bild
139	<p><b>IKV-4x4</b></p> <p>R&amp;R Industrial keyboard                      mounting version                      lettering engraved                      front plate Al elox                      (W x H x D) 115 x 115 x 30 mm                      4 x 4 patented R&amp;R-keys                      brass-key caps Typ V                      lift 3 mm, actuation force 1 N                      connection matrix                      2-row 8-pin plug                      front side protection class IP 6 5                      data sheet DNR 4357</p>	
159	<p><b>IKV-INFO AT</b></p> <p>R&amp;R Industrial keyboard                      mounting version                      front plate Al elox                      lettering engraved                      (W x H x D) 190 x 213 x 30 mm                      max. 5 x 7 patented R&amp;R-keys                      brass-key caps Typ V                      3 mm lift, actuation force 1 N                      5-pin diode plug                      cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 4033</p>	
20	<p><b>IKV3-12B</b></p> <p>R&amp;R Industrial keyboard                      mounting version Al / PE                      (W x H x D) 86 x 110 x 42 mm                      4 x 3 vandal-proof R&amp;R-keys                      key cap Typ V3 18 x 18 mm                      Zn die cast drum-nickelized                      lift 1,5 mm, actuation force 1,5 N                      matrix 2 x 6 diode separated                      front side protection class IP 6 5                      data sheet DNR 5957</p>	
444	<p><b>IKV3-12C</b></p> <p>R&amp;R Industrial keyboard                      front plate V4A                      (W x H x D) 120 x 120 x appr. 60 mm                      4 x 3 vandal-proof R&amp;R-keys                      key cap Typ V3 18 x 18 mm                      Zn die cast drum-nickelized                      lift 3 mm, actuation force 1 N                      power supply 230 V AC                      relay output 1 x double-throw contact                      code keyboard                      front side protection class IP 6 5                      data sheet DNR 6678</p>	



## R&R metal keyboards





April 2004

www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
704	<p>IKV3-12D 20 mA</p> <p>R&amp;R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&amp;R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N matrix diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin Molex plug data sheet DNR 6849</p>	
479	<p>IKV3-12D AT</p> <p>R&amp;R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&amp;R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N AT-interface diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin diode plug data sheet DNR 6849</p>	
995	<p>IKV3-12D RS232C</p> <p>R&amp;R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&amp;R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N AT-interface diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 9 pin SUB-D plug data sheet DNR 6849</p>	
651	<p>IKV3-12E</p> <p>R&amp;R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&amp;R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N matrix interface 2 x 6 with diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 10 pin plug data sheet DNR 7621</p>	

## R&R metal keyboards

April 2004



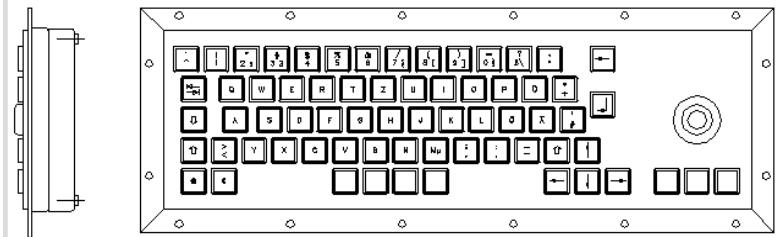

www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
706	<p>IKV3-12F RS485</p> <p>R&amp;R Industrial keyboard front plate aluminium (W x H x D) 120 x 120 x 42 mm with 4 x 3 vandal-proof R&amp;R metal keys Typ V3 lift 1.2 mm actuation force 1.5 N RS485-interface matrix diode separated nkey-roll-over weight appr. 0,5 kg front side protection class IP 6 5 3 m cable , 5 pin diode plug data sheet DNR 7911</p>	 <p>The drawing shows a top-down view of the keyboard with dimensions: 120 mm width, 115 mm height, and 36 mm depth. The key layout includes a numeric keypad (7-9, 4-6, 1-3), a Del key, a 0 key, and an Enter key. A 5-pin diode plug is shown at the bottom.</p>
797	<p>IKV5-1 Industrietaster</p> <p>Tischgehäuse Frontplatte Aluminium eloxiert (B x H x T) 80 x 80 x 27,5 mm (ohne) Kabelausgang patentierte R&amp;R Taste, 3 mm Hub. 3 N Betätigungskraft deutlicher Druckpunkt, Lebensdauer &gt; 3 Millionen Hübe Kontakt- und Führungselemente im gedichteten Raum Metall-Tastenkappe V5, Beschriftung graviert Schutzart IP 6 5 (Schutz gegen Staub und Strahlwasser) Betriebstemperatur -30°C bis +80 Datenblatt DNR 8461</p>	 <p>A photograph of a square, silver-colored metal industrial key with a single button in the center, mounted on a yellow background.</p>
1619	<p>IKV5-811-1</p> <p>R&amp;R industrial keyboard mountable case front panel Al electrolytic-oxidated (W x H x D) 119 x 119 x 30 mm 16 patented R&amp;R metall keys V5 key travel 1.2 mm, actuation force 1.5 N lifetime &gt; 3 million cycles front side IP 6 5 10 clamps binary coded + strobe / 24 V data sheet DNR 11701</p>	 <p>A photograph of a square, silver-colored industrial keyboard with 16 keys (7-9, 4-6, 1-3, 0, and F1-F8) mounted on a green background.</p>
1620	<p>IKV5-811-2</p> <p>R&amp;R industrial keyboard plastic case light grey RAL 7035 (W x H x D) 120 x 122 x 55 mm 16 patented R&amp;R metall keys V5 key travel 1.2 mm, actuation force 1.5 N lifetime &gt; 3 million cycles front side IP 6 5 10 clamps binary coded + strobe / 24 V data sheet DNR 12097</p>	 <p>A photograph of a square, light grey plastic industrial keyboard with 16 keys (7-9, 4-6, 1-3, 0, and F1-F8) mounted on a textured grey surface.</p>

Art.-Nr	Bezeichnung	Bild
867	<p><b>IKV6-318 PS2</b></p> <p>R&amp;R Industrial keyboard                      front plate stainless steel                      (W x H x D) 328 x 140 x 30 mm                      64 patented R&amp;R-keys with vandal proof metall                      key caps V6                      silicon key DNR 7467                      lift 1.5 mm, actuation force 2 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5                      data sheet DNR 8907</p>	
1001	<p><b>IKV6-318-1 PS2</b></p> <p>R&amp;R Industrial keyboard                      front plate Al anodized                      (W x H x D) 328 x 140 x 30 mm                      64 patented R&amp;R-keys with vandal proof metall                      key caps V6                      Aluminium blue anodized                      inscription engraved                      silicon key DNR 7467                      lift 1.5 mm, actuation force 2 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5                      data sheet DNR 9632</p>	
869	<p><b>IKV6-318-J PS2/PS2</b></p> <p>R&amp;R Industrial keyboard                      with integrated 38 mm tracking ball                      front plate stainless steel                      (W x H x D) 398 x 140 x 30 mm                      64 patented R&amp;R-keys with vandal proof metall                      key caps V6                      silicon key DNR 7467                      lift 1.5 mm, actuation force 2 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5                      back side IP 5 4                      protection class IP 54                      data sheet DNR 8931</p>	
868	<p><b>IKV6-318-T PS2/PS2</b></p> <p>R&amp;R Industrial keyboard                      with integrated 38 mm tracking ball                      front plate stainless steel                      (W x H x D) 398 x 140 x 30 mm                      64 patented R&amp;R-keys with vandal proof metall                      key caps V5                      silicon key DNR 7467                      lift 1.5 mm, actuation force 2 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5                      back side IP 5 4                      trackball protection class IP 54                      data sheet DNR 8908</p>	



## R&R metal keyboards

April 2004

www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
1359	<p>IKV6-318-T USB/USB</p> <p>R&amp;R Industrial keyboard with integrated stainless steel 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 8908</p>	
1263	<p>IKV6-318-T2 PS2/PS2</p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 layout DNR 10399 data sheet DNR 8908</p>	
1304	<p>IKV6-318-T2 PS2/PS2</p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 layout DNR 10399 data sheet DNR 8908</p>	
1391	<p>IKV6-318-T3 PS2/PS2</p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate stainless steel (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 8908</p>	

## R&R metal keyboards



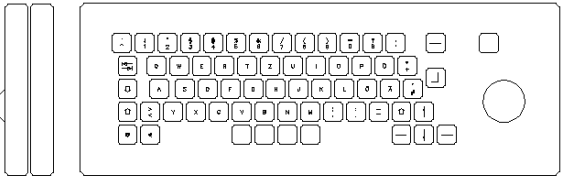
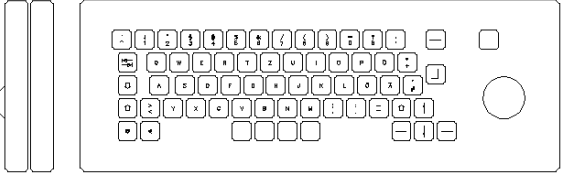
April 2004

www.RuRGmbH.de info@RuRGmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
1404	<p><b>IKV6-318-T4 PS2/PS2</b></p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 11217</p>	
1500	<p><b>IKV6-318-T5 PS2/PS2</b></p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball mountable housing Aluminium anodized (W x H x D) 400 x 144 x 40 mm 64 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet DNR 11457</p>	
1506	<p><b>IKV6-318-T5 V2A PS2/PS2</b></p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball housing stainless steel (W x H x D) 400 x 144 x 40 mm 64 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 ball stainless steel data sheet DNR 11457</p>	
1501	<p><b>IKV6-318-T5 V2A PS2/PS2</b></p> <p>R&amp;R Industrial keyboard with integrated 38 mm tracking ball housing stainless steel (W x H x D) 400 x 144 x 40 mm 64 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 ball stainless steel data sheet DNR 11457</p>	



## R&R metal keyboards



April 2004

www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
1643	<p data-bbox="233 327 448 349">IKV6-318-T6 PS2/PS2</p> <p data-bbox="233 371 679 730">R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 12202</p>	
1735	<p data-bbox="233 775 448 797">IKV6-318-T7 PS2/PS2</p> <p data-bbox="233 819 679 1178">R&amp;R Industrial keyboard with integrated 38 mm tracking ball front plate al anodized (W x H x D) 398 x 140 x 30 mm 67 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 11001 lift 1.5 mm, actuation force 1 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 65 data sheet 12291</p>	
1046	<p data-bbox="233 1223 432 1245">IKV6-318S PS2/PS2</p> <p data-bbox="233 1267 679 1626">R&amp;R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 9840</p>	
1222	<p data-bbox="233 1671 448 1693">IKV6-318S2 PS2/PS2</p> <p data-bbox="233 1715 679 2074">R&amp;R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 9840</p>	



## R&R metal keyboards





April 2004

www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30

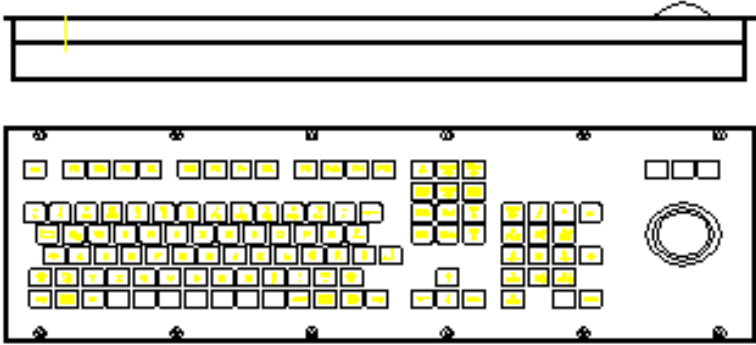
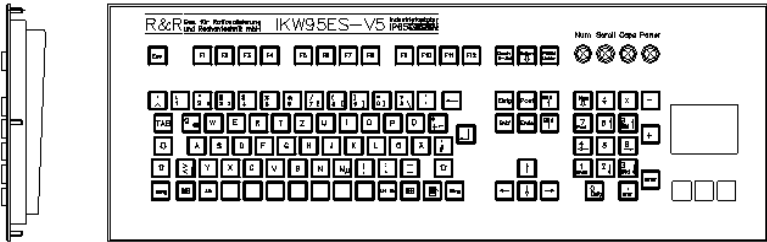
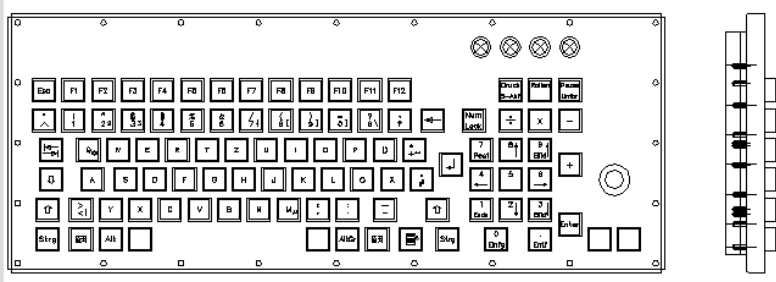
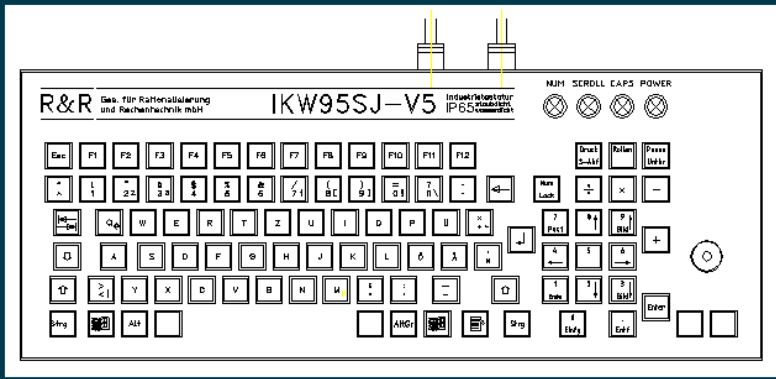
Kreissparkasse Tuttlingen (BLZ 64350070) 392

USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
1642	<p>IKV6-318S PS2/PS2</p> <p>R&amp;R Industrial keyboard with integrated touchpad front plate al anodized (W x H x D) 398 x 140 x 30 mm 64 patented R&amp;R-keys with vandal proof metall key caps V5 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 3 million cycles watchdog, cable 3 m protection class IP 6 5 back side IP 5 4 trackball protection class IP 54 data sheet DNR 9840</p>	
1421	<p>IKV6-4x4-2</p> <p>R&amp;R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	
1622	<p>IKV6-4x4-2 stainless steel</p> <p>R&amp;R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	
1698	<p>IKV6-4x4-2</p> <p>R&amp;R Industrial keyboard front plate aluminium anodized (W x H x D) 94 x 106 x 32 mm 4x4 patented R&amp;R-keys with vandal proof metall key caps V6 silicon key DNR 7467 lift 1.5 mm, actuation force 2 N lifetime &gt; 2 million cycles protection class IP 6 5 data sheet DNR 11126</p>	

**R&R metal keyboards**  
**April 2004**  
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30  
 Kreissparkasse Tuttlingen (BLZ 64350070) 392  
 USt.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
1306	<p><b>IKV6-W95ET PS2/PS2 V2A</b></p> <p>R&amp;R Industrial mountable keyboard                      trackball                      Ball diameter 38 mm                      Seal material PTFE                      front plate stainless steel                      (W x H x D) 572 x 188,3 x 65 mm                      108 patented R&amp;R-keys                      metall key cap V5                      lift 3 mm, actuation force 1 N                      watchdog, cable 3 m                      protection class IP65 (keyboard)/ IP 54 (trackball)                      all around                      datasheet DNR 10626</p>	
841	<p><b>IKW95ES-V5 PS2/PS2</b></p> <p>R&amp;R Industrial desktop keyboard                      touch pad                      front plate Al anodised                      (W x H x D) 560 x 200 x 34 mm                      108 patented R&amp;R-keys                      metal key tops V5                      lift 3 mm, actuation force 1 N                      watchdog                      cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 8788</p>	
853	<p><b>IKW95SJ-LV5 PS2/PS2 IP65 deutsch</b></p> <p>R&amp;R Industrial keyboard                      joystick with patented capacitive sensing                      (W x H x D) 422 x 166 x 33 mm                      97 patented R&amp;R-keys                      vandal proof metall key tops V5                      silicon switching pad DNR 3374                      lift 3 mm, actuation force 1 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5                      data sheet DNR 8821</p>	
624	<p><b>KW95SJ-V5 IP65 AT / RS232C</b></p> <p>R&amp;R Industrial keyboard                      joystick with patented capacitive sensing                      front plate Al elox                      (W x H x D) 420 x 164 x 30 mm                      97 patented R&amp;R-keys with vandal proof metall                      key caps V5                      silicon switching pad DNR 3374                      lift 3 mm, actuation force 1 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 7543</p>	

**R&R metal keyboards**  
**April 2004**  
 www.RuRgmbH.de info@RuRgmbH.de

Ob der Eck 4 78148 Gütenbach Telefon (07723) 9186-0 Fax 9186-30  
 Kreissparkasse Tuttlingen (BLZ 64350070) 392  
 Ust.-IdNr.: DE141907699

Art.-Nr	Bezeichnung	Bild
628	<p>KW95SJ-V5 IP65 PS2 / PS2</p> <p>R&amp;R Industrial keyboard                      joystick with patented                      capacitive sensing                      front plate Al elox                      (W x H x D) 420 x 164 x 30 mm                      97 patented R&amp;R-keys with vandal proof metal                      key caps V5                      silicon switching pad DNR 3374                      lift 3 mm, actuation force 1 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 7543</p>	
627	<p>IKW95S-V5 IP65 AT</p> <p>R&amp;R Industrial keyboard                      front plate Al elox                      (W x H x D) 420 x 164 x 30 mm                      95 patented R&amp;R-keys with vandal proof metal                      key caps V5                      silicon switching pad DNR 3374                      lift 3 mm, actuation force 1 N                      lifetime &gt; 3 million cycles                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 7544</p>	
839	<p>IKW95T3V5 PS2/PS2</p> <p>R&amp;R Industrial desktop keyboard                      trackball                      Ball diameter 34 mm                      Seal material PTFE                      front plate Al anodized                      (W x H x D) 536 x 172 x 30 mm                      108 patented R&amp;R-keys                      metall key cap V5                      lift 3 mm, actuation force 1 N                      watchdog, cable 3 m                      protection class IP 5 4 all around                      data sheet DNR 8548</p>	
840	<p>IKW95V5 PS2</p> <p>R&amp;R Industrial desktop keyboard                      front plate Al elox                      (W x H x D) 536 x 172 x 30 mm                      105 patented R&amp;R-keys                      metall key cap V5                      lift 3 mm, actuation force 1 N                      watchdog, cable 3 m                      protection class IP 6 5 all around                      data sheet DNR 8785</p>	